


# Grade CH Insulation

- High Hot Compressive Strength
- Rugged and Durable
- Low Thermal Conductivity
- Oil and Moisture Resistant
- Dimensionally Stable
- Reduces Heat Loss
- Faster Mold Startup

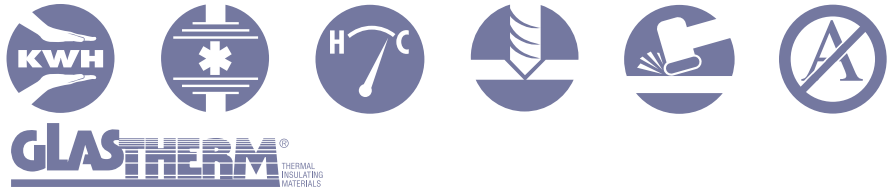

GlasTherm Grade CH is a totally new thermal insulating sheet from Glastic. This highly heat-resistant composite material combines low thermal conductivity with very high compressive strength at molding temperature. Finished to a close thickness tolerance, it is ideal for many of the more difficult molding applications.

General Information	Procedure	English Units	Typical Values	Metric Units	Typical Values
Part Number			3921		3921
Standard Color			Purple		Purple
Continuous Use Temperature		° F	550	° C	285
<b>Mechanical Properties</b>					
Flexural Strength	ASTM D 790	Psi	55,000	Mpa	379
Compressive Strength	ASTM D 695				
@75° F/24° C		Psi	82,600	Mpa	570
@302° F/150° C		Psi	49,600	Mpa	342
@392° F/200° C		Psi	33,000	Mpa	228
@550° F/288° C		Psi	28,000	Mpa	193
Compressive Modulus	ASTM D 695	Psi	2,500,000	Mpa	17,237
IZOD Impact Strength (notched)	ASTM D 256	Ft.lb./in.	16	J/cm	8.5
<b>Physical Properties</b>					
Water Absorption	ASTM D 570	% by wt.	0.04	% by wt.	0.04
Density	ASTM D 792	lbs/ft <sup>3</sup>	117	g/cm <sup>3</sup>	1.87
Thickness Tolerance		inches	±0.002	mm	±0.05
CTE Across the Surface	ASTM D 696	in/in/° C	13.1•10 <sup>-6</sup>	mm/mm/° C	13.1•10 <sup>-6</sup>
Thermal Conductivity	ASTM C 177	BTU•in/Hr•Ft <sup>2</sup> •° F	1.4	W/m•K	0.20
Sheet Size		in	39.4 x 78.7	m	1 x 2

## Jaco Products : Available Cut to Size and/or Fabricated to your Specifications

15060 Madison Road | Middlefield, OH 44062 | phone 440-632-5800 | fax 440-632-0012 | sales@jacoproducts.com

All of the information, suggestions, and recommendations pertaining to the properties and uses of the Glastic products described herein are based upon tests and data believed to be accurate; however, the final determination regarding the suitability of any material described herein for the use contemplated, the manner of such use, and whether the use infringes any patents is the sole responsibility of the user. **THERE IS NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Under no circumstances shall we be liable for incidental or consequential loss or damage.

Glastic® is a registered trademark of Glastic Corporation. UL® is a registered trademark of Underwriters Laboratories, Inc. ©2002 Glastic Corporation. All Rights Reserved. Printed in USA GL-0122 0602